

PHT-200

premade bags packaging machine


(stainless steel main frame)



**Works best for
High Mix, Low Volume manufacturing**

- More versatile than film roll
- Less packaging material stock
- Easier to re-configure
- Less film wastage
- Easy to adapt to changing needs
- Wider selection of bag sizes
- Less expensive size change
- Suits rapidly-changing market

Rotary Process

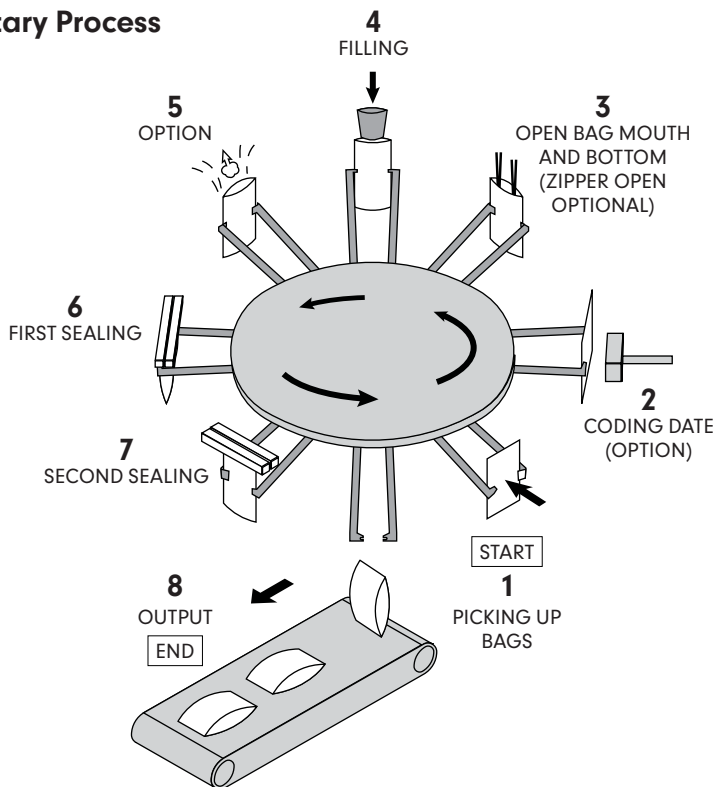

Technical Parameters

ITEMS	CONTENT
Packing speed	1500-3000 bag/min
Bag size	(L)100-350mm (W)100-240mm
Bag making mode	Flat bag, standing bag, portable bag
Power supply	380V 50Hz
Total power	5.5 KW
Compressed air	0.6MPa
Vacuum pump exhaust pressure	0.8 MP
Air displacement	≥0.6m ³ /min
Dimension	1645×1450×1455mm
Weight of switchboard	1200kg

We are a young but experienced team, we guarantee you will learn something from a single meeting that you cannot find on the net.

Call us to serve your needs.



Packagers Pte Ltd
 7 Senoko Loop Singapore 758146
 Tel +65 6756 6522
 info@packagers.com.sg